


2-Phase Stepping Motor Bi-Polar Type (NEMA 24 60mm · 1.8°)



MOTOR SPECIFICATIONS

Model	Current	Resistance	Inductance	Holding torque		Inertia	Length	Weight	
	A	$\Omega \pm 10\%$	mH $\pm 20\%$	N.m	OZ.in	g/cm ²	mm Max	Kg	Lbs
SD60H248-2004	2.0	1.7	3.9	1.1	155.77	240	47	0.6	1.3
SD60H248-3004	3.0	0.6	1.5	1.1	155.77	240	47	0.6	1.3
SD60H248-4004	4.0	0.38	0.78	1.1	155.77	240	47	0.6	1.3
SD60H256-2004	2.0	1.8	5.7	1.5	212.42	340	56	0.8	1.8
SD60H256-3004	3.0	0.76	2.3	1.5	212.42	340	56	0.8	1.8
SD60H256-4004	4.0	0.44	1.1	1.5	212.42	340	56	0.8	1.8
SD60H269-3004	3.0	1.0	3.2	2.1	297.38	490	68	1.0	2.2
SD60H269-4004	4.0	0.6	1.9	2.1	297.38	490	68	1.0	2.2
SD60H269-5004	5.0	0.34	1.1	2.1	297.38	490	68	1.0	2.2
SD60H286-3004	3.0	1.3	5.0	3.0	424.83	690	85	1.3	2.9
SD60H286-4004	4.0	0.78	2.7	3.0	424.83	690	85	1.3	2.9
SD60H286-5004	5.0	0.43	1.7	3.0	424.83	690	85	1.3	2.9

DIMENSION (UNIT:MM)

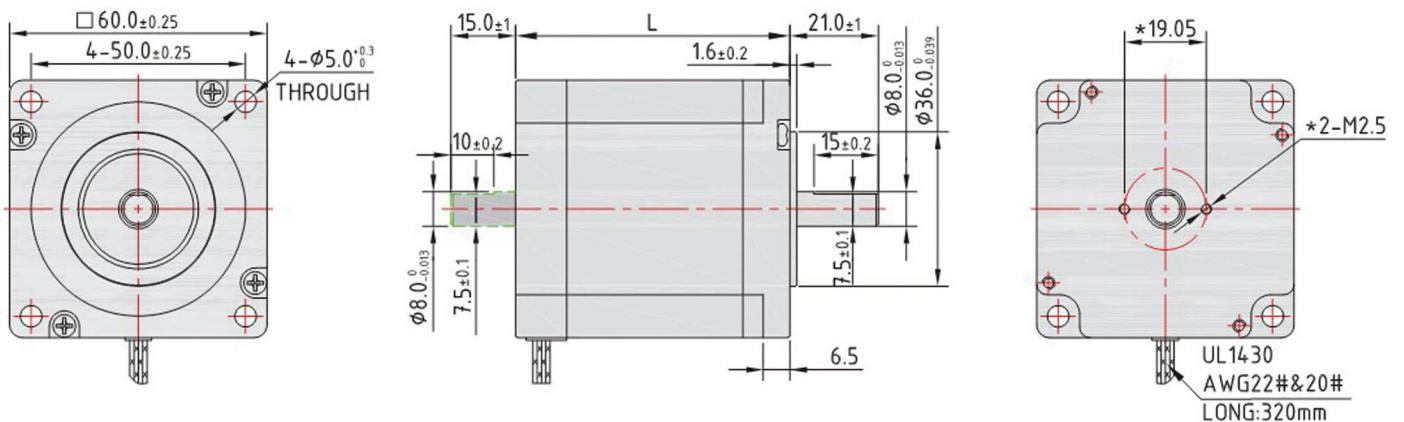

2-Phase Stepping Motor Bi-Polar Type (NEMA 24 60mm · 1.8°)

TORQUE-FREQUENCY CURVE

